



CompoSe 600Y




CompoSe 600Y - Y shaped LED based modular intelligent luminaire. Intended for use as a module in a CompoSe 600 array, or as an individual luminaire when fully framed. Direct and Direct/Indirect light distribution options: '1Way' and '2Way'. 'Frameless' panel design with a 'floating' 8mm Satin high-grade acrylic diffuser panel.




Side Elevation




Front Elevation

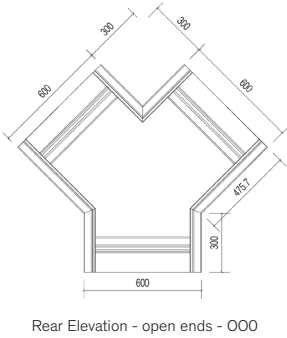

Rear Elevation - open ends - OOO

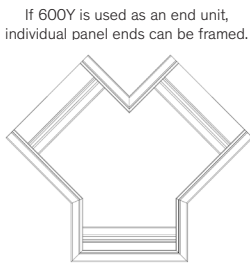

Rear Elevation - one end framed - OOF



Rear Elevation - fully framed - FFF

If 600Y is used as an end unit, individual panel ends can be framed.

Applications

Ceiling suspended as part of a CompoSe 600 ceiling feature  
Ceiling suspended as an individual luminaire

Wall mounted as part of a CompoSe 600 wall feature  
Wall mounted as an individual luminaire

Size Options


CompoSe 600 Y - 600mm wide x 32mm visible edge. Standard dimensions as per drawing. Custom panel sizes to minimise joints can be manufactured on a project-to-project basis - maximum overall module size must fit within a 1200x2400mm rectangle. CompoSe Y is also available in 300 and 450mm widths. Custom widths up to 600mm - on request.

LED Options

CCT **Standard White** - 2700K, 3000K, 4000K, 5000K, 6500K / **Tunable White** - 2200K to 6500K / **RGB** - fully dynamic.  
CRI 80 / CRI 90 optional for 2700K, 3000K, 4000K

Light Performance


'1Way'

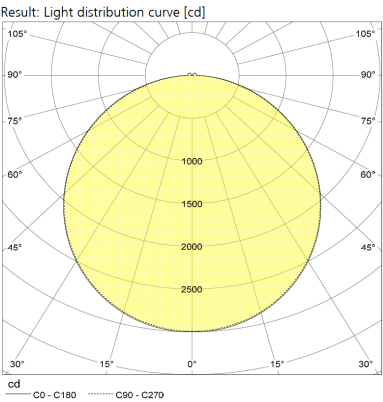

CompoSe 600Y		Luminaire	
CCT		Flux	Efficacy
White	2700K	8385lm	65lm/W
	3000K	8861lm	69lm/W
	4000K	9528lm	74lm/W
	5000K	9528lm	74lm/W
	6500K	9528lm	74lm/W
Tunable White	2200-6500K	6853lm	66lm/W

Tunable White: normalised output  
CRI: 80, CRI 90 optional for 2700K, 3000K, 4000K  
Luminaire input power: 122W for white, 109W for TW  
Standby power: 0.5 W  
Rated median useful life: 50000h L80 at 25C  
Colour tolerance: MacAdam 3

'2Way'

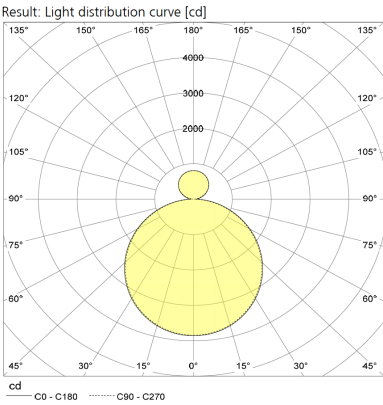

CompoSe 600Y		Luminair	
CCT		Flux	Efficacy
White	2700 K	8091lm	63lm/W
	3000K	8551lm	66lm/W
	4000K	9195lm	71lm/W
	5000K	9195lm	71lm/W
	6500K	9195lm	71lm/W
Tuneable White	2200-6500K	6613lm	64lm/W

Tuneable White: normalised output  
CRI: 80. CRI 90 optional for 2700K, 3000K, 4000K  
Luminair input power: 122W for white, 109W for TW  
Standby power: 0,5 W  
Rated median useful life: 50000h L80 at 25C  
Colour tolerance: MacAdam 3

Design Options

Standard front panel design - 8mm Satin high-grade acrylic diffuser panel.

Design Options: **Printed** - Custom print design, digitally applied to individual panels or over multiple panels

**Etched** - Custom etch design, digitally laser-etched on individual panels or over multiple panels. This option shows an 8mm visible frame.

Control

Individually Intelligent Panel - integrated DALI LED driver (type DT6 or DT8) for calibration, dimming and colour control. Electronic Panel Connector to feed and control up to 5 lm. CompoSe panels with only 1 Power/DALI cable. Full range of fixed and wireless panel control options. Panels can be controlled individually, in groups or multiple groups. Remote programming and monitoring. Supports DALI daylight, motion sensors etc.

Properties

'Frameless' panel design as a result of a proprietary 'diffuser-to-frame' fixing system. Liquid Nitrogen extruded, high quality aluminium profiles, for best possible natural anodised finish. Flat luminair with 32mm visible edge. Frameless panel ends with connectors where panels connect in a CompoSe array, to ensure optimised panel joint experience. High-grade 8mm Satin PMMA (acrylic) diffuser for optimised light distribution and glare control. 48V LED system with integrated DALI LED driver, Electronic Panel Connector and a connected decorative 5-core power lead. Ceiling Suspended with a 1,5mm dia wire suspension system or Wall Mount with proprietary wall bracket system.