

LED System

Correlated Colour Temperature (CCT)

Standard White - 2700K, 3000K, 4000K, 5000K, 6500K

Tunable White - 2200K to 6500K

RGB - fully dynamic

Colour Rendering Index:

Ra > 80

Ra > 90 optional for 2700K, 3000K, 4000K



Colour Tolerance:

MacAdam 3


LED Service Life:

L80 (tq 25 °C) = 50.000 h

Light Distribution

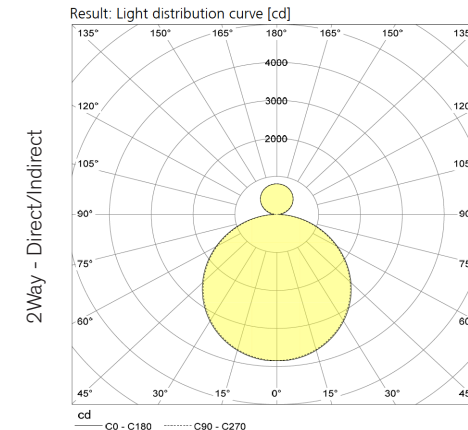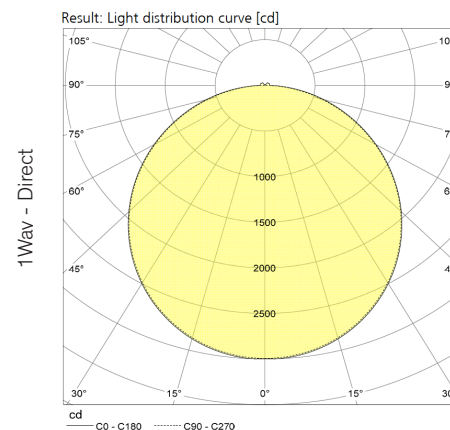

CompoSe 300

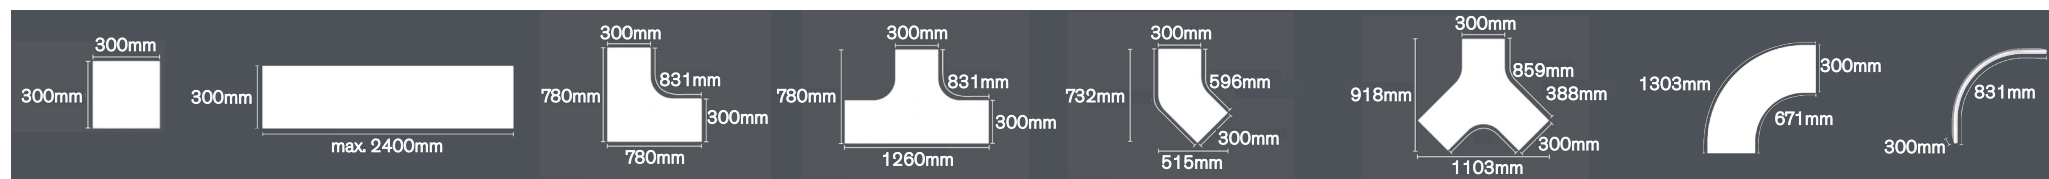

1Way (Direct)		Luminair - Luminous Flux (lm)					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
C300 SQ	2.037lm	2.153lm	2.315lm	2.315lm	2.315lm	1.665lm	37W	28W	55lm/W	58lm/W	63lm/W	63lm/W	63lm/W	59lm/W
C300 R (l=1200mm)	8.150lm	8.613lm	9.261lm	9.261lm	9.261lm	6.616lm	120W	104W	68lm/W	72lm/W	77lm/W	77lm/W	77lm/W	64lm/W
C300 L90	8.119lm	8.581lm	9.227lm	9.227lm	9.227lm	6.636lm	125W	104W	65lm/W	69lm/W	74lm/W	74lm/W	74lm/W	64lm/W
C300 T	9.923lm	10.486lm	11.276lm	11.276lm	11.276lm	8.110lm	152W	132W	65lm/W	69lm/W	74lm/W	74lm/W	74lm/W	62lm/W
C300 L135	4.890lm	5.168lm	5.557lm	5.557lm	5.557lm	3.997lm	79W	66W	62lm/W	66lm/W	71lm/W	71lm/W	71lm/W	61lm/W
C300 Y	8.656lm	9.148lm	9.836lm	9.836lm	9.836lm	7.075lm	134W	113W	65lm/W	68lm/W	74lm/W	74lm/W	74lm/W	63lm/W
C300 C	7.247lm	7.658lm	8.235lm	8.235lm	8.235lm	5.923lm	111W	94W	65lm/W	69lm/W	74lm/W	74lm/W	74lm/W	63lm/W
C300 CV	5.644lm	5.965lm	6.413lm	6.413lm	6.413lm	4.613lm	83W	75W	68lm/W	72lm/W	77lm/W	77lm/W	77lm/W	61lm/W

2Way (Direct/Indirect)		Luminair - Luminous Flux (lm)					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
C300 SQ	1.966lm	2.078lm	2.234lm	2.234lm	2.234lm	1.607lm	37W	28W	53lm/W	56lm/W	60lm/W	60lm/W	60lm/W	57lm/W
C300 R (l=1200mm)	7.865lm	8.312lm	8.937lm	8.937lm	8.937lm	6.428lm	120W	104W	66lm/W	69lm/W	75lm/W	75lm/W	75lm/W	62lm/W
C300 L90	7.835lm	8.281lm	8.904lm	8.904lm	8.904lm	6.404lm	125W	104W	63lm/W	67lm/W	72lm/W	72lm/W	72lm/W	62lm/W
C300 T	9.575lm	10.120lm	10.881lm	10.881lm	10.881lm	7.826lm	152W	132W	63lm/W	67lm/W	72lm/W	72lm/W	72lm/W	59lm/W
C300 L135	4.719lm	4.987lm	5.362lm	5.362lm	5.362lm	3.857lm	78W	66W	60lm/W	64lm/W	68lm/W	68lm/W	68lm/W	58lm/W
C300 Y	8.353lm	8.828lm	9.492lm	9.492lm	9.492lm	6.827lm	134W	113W	62lm/W	66lm/W	71lm/W	71lm/W	71lm/W	60lm/W
C300 C	6.993lm	7.391lm	7.497lm	7.497lm	7.497lm	5.716lm	111W	94W	63lm/W	67lm/W	72lm/W	72lm/W	72lm/W	61lm/W
C300 CV	5.446lm	5.756lm	6.189lm	6.189lm	6.189lm	4.452lm	83W	75W	66lm/W	69lm/W	74lm/W	74lm/W	74lm/W	59lm/W

Tunable white: normalised output

Standby power: 0,5 W

LED System

Correlated Colour Temperature (CCT)

Standard White - 2700K, 3000K, 4000K, 5000K, 6500K

Tunable White - 2200K to 6500K

RGB - fully dynamic

Colour Rendering Index:

Ra > 80

Ra > 90 optional for 2700K, 3000K, 4000K



Colour Tolerance:

MacAdam 3

LED Service Life:

L80 (tq 25 °C) = 50.000 h

Light Distribution

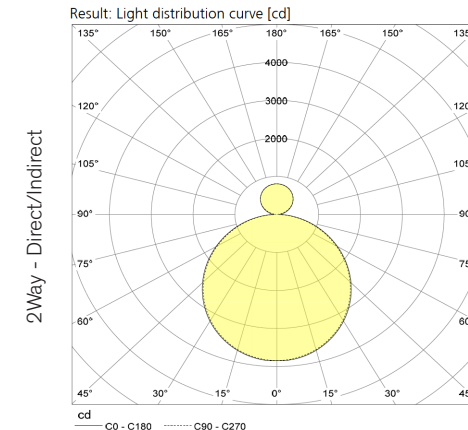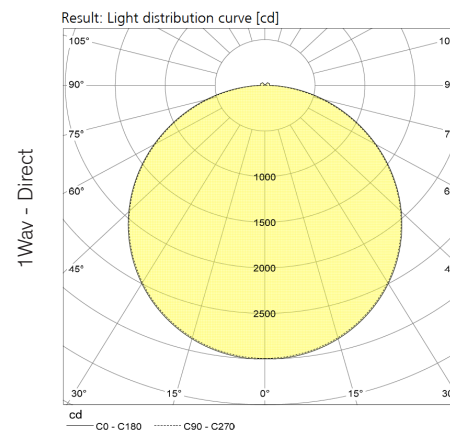

CompoSe 450



1Way (Direct)		Luminair - Luminous Flux (lm)						Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW		2700K	3000K	5000K	4000K	6500K	TW2200-6500K
C450 SQ	3.371lm	3.563lm	3.831lm	3.831lm	3.831lm	2.756lm	46W	38W		73lm/W	77lm/W	83lm/W	83lm/W	83lm/W	73lm/W
C450 R (l=1200mm)	8.991lm	9.501lm	10.217lm	10.217lm	10.217lm	7.348lm	120W	104W		75lm/W	79lm/W	85lm/W	85lm/W	85lm/W	71lm/W
C450 L90	11.879lm	12.554lm	13.499lm	13.499lm	13.499lm	9.709lm	166W	142W		72lm/W	76lm/W	81lm/W	81lm/W	81lm/W	69lm/W
C450 T	14.205lm	15.012lm	16.142lm	16.142lm	16.142lm	11.610lm	194W	165W		73lm/W	78lm/W	83lm/W	83lm/W	83lm/W	70lm/W
C450 L135	7.657lm	8.092lm	8.701lm	8.701lm	8.701lm	6.258lm	115W	90W		66lm/W	70lm/W	75lm/W	75lm/W	75lm/W	70lm/W
C450 Y	12.576lm	13.290lm	14.290lm	14.290lm	14.290lm	10.279lm	175W	151W		72lm/W	76lm/W	82lm/W	82lm/W	82lm/W	68lm/W
C450 C	10.643lm	11.247lm	12.094lm	12.094lm	12.094lm	8.699lm	148W	123W		72lm/W	76lm/W	82lm/W	82lm/W	82lm/W	71lm/W
C450 CV	6.226lm	6.580lm	7.075lm	7.075lm	7.075lm	5.089lm	83W	75W		75lm/W	79lm/W	85lm/W	85lm/W	85lm/W	67lm/W

2Way (Direct/Indirect)		Luminair - Luminous Flux (lm)						Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW		2700K	3000K	5000K	4000K	6500K	TW2200-6500K
C450 SQ	3.254lm	3.438lm	3.697lm	3.697lm	3.697lm	2.659lm	46W	38W		70lm/W	74lm/W	80lm/W	80lm/W	80lm/W	70lm/W
C450 R (l=1200mm)	8.676lm	9.169lm	9.859lm	9.859lm	9.859lm	7.091lm	120W	104W		72lm/W	77lm/W	82lm/W	82lm/W	82lm/W	68lm/W
C450 L90	11.463lm	12.114lm	13.026lm	13.026lm	13.026lm	9.369lm	166W	141W		69lm/W	73lm/W	78lm/W	78lm/W	78lm/W	66lm/W
C450 T	13.708lm	14.487lm	15.577lm	15.577lm	15.577lm	11.204lm	194W	165W		71lm/W	75lm/W	80lm/W	80lm/W	80lm/W	68lm/W
C450 L135	7.389lm	7.809lm	8.397lm	8.397lm	8.397lm	6.039lm	115W	90W		64lm/W	68lm/W	73lm/W	73lm/W	73lm/W	67lm/W
C450 Y	12.136lm	12.825lm	13.790lm	13.790lm	13.790lm	9.919lm	175W	151W		69lm/W	73lm/W	79lm/W	79lm/W	79lm/W	66lm/W
C450 C	10.270lm	10.854lm	11.671lm	11.671lm	11.671lm	8.394lm	148W	123W		70lm/W	74lm/W	79lm/W	79lm/W	79lm/W	68lm/W
C450 CV	6.008lm	6.350lm	6.827lm	6.827lm	6.827lm	4.911lm	83W	75W		72lm/W	76lm/W	82lm/W	82lm/W	82lm/W	65lm/W

Tunable white: normalised output

Standby power: 0,5 W

LED System

Correlated Colour Temperature (CCT)

Standard White - 2700K, 3000K, 4000K, 5000K, 6500K

Tunable White - 2200K to 6500K

RGB - fully dynamic

Colour Rendering Index:

Ra > 80

Ra > 90 optional for 2700K, 3000K, 4000K



Colour Tolerance:

MacAdam 3


LED Service Life:

L80 (tq 25 °C) = 50.000 h

Light Distribution

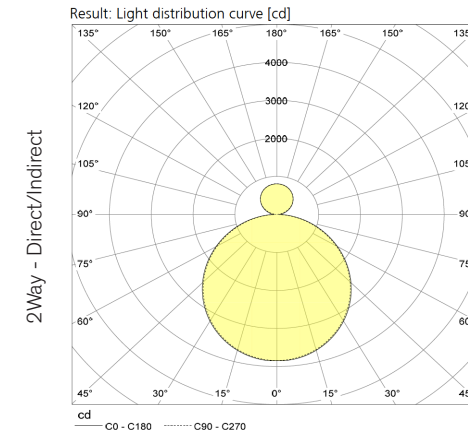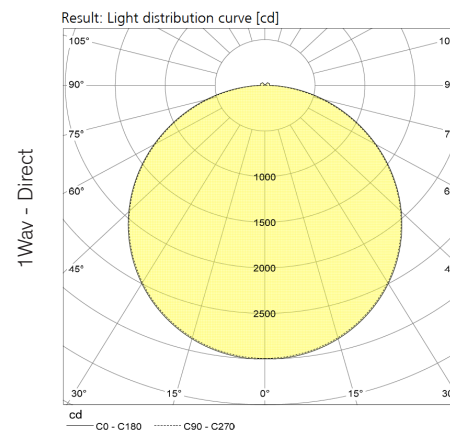

CompoSe 600

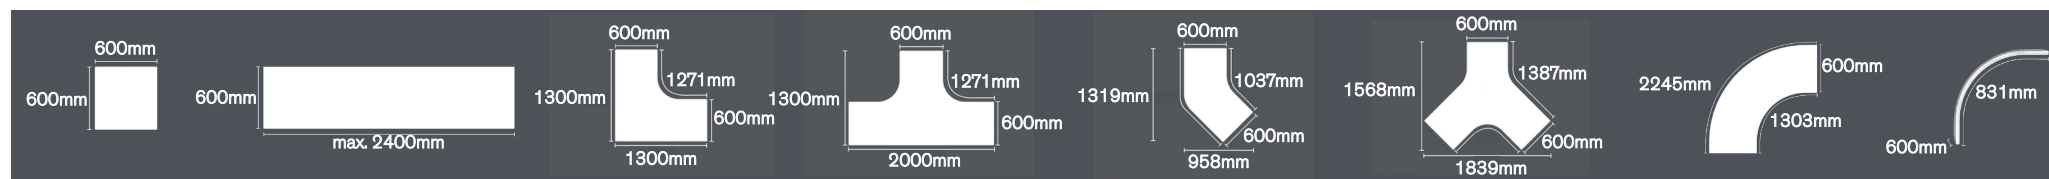

1Way (Direct)		Luminair - Luminous Flux (lm)					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
C600 SQ	4.675lm	4.941lm	5.313lm	5.313lm	5.313lm	3.821lm	65W	57W	72lm/W	76lm/W	82lm/W	82lm/W	82lm/W	67lm/W
C600 R (l=1200mm)	9.351lm	9.882lm	10.626lm	10.626lm	10.626lm	7.643lm	120W	104W	78lm/W	82lm/W	89lm/W	89lm/W	89lm/W	74lm/W
C600 L90	15.082lm	15.939lm	17.139lm	17.139lm	17.139lm	12.327lm	208W	170W	73lm/W	77lm/W	83lm/W	83lm/W	83lm/W	73lm/W
C600 T	17.696lm	18.702lm	20.109lm	20.109lm	20.109lm	14.464lm	240W	198W	74lm/W	78lm/W	84lm/W	84lm/W	84lm/W	73lm/W
C600 L135	10.009lm	10.578lm	11.374lm	11.374lm	11.374lm	8.181lm	134W	113W	75lm/W	79lm/W	85lm/W	85lm/W	85lm/W	72lm/W
C600 Y	15.390lm	16.264lm	17.488lm	17.488lm	17.488lm	12.579lm	217W	179W	71lm/W	75lm/W	81lm/W	81lm/W	81lm/W	70lm/W
C600 C	13.824lm	14.609lm	15.709lm	15.709lm	15.709lm	11.299lm	185W	151W	75lm/W	79lm/W	85lm/W	85lm/W	85lm/W	75lm/W
C600 CV	6.475lm	6.843lm	7.358lm	7.358lm	7.358lm	5.293lm	83W	76W	78lm/W	82lm/W	89lm/W	89lm/W	89lm/W	70lm/W

2Way (Direct/Indirect)		Luminair - Luminous Flux (lm)					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
C600 SQ	4.512lm	4.768lm	5.127lm	5.127lm	5.127lm	3.688lm	65W	57W	70lm/W	74lm/W	79lm/W	79lm/W	79lm/W	65lm/W
C600 R (l=1200mm)	9.024lm	9.536lm	10.254lm	10.254lm	10.254lm	7.375lm	120W	104W	75lm/W	80lm/W	86lm/W	86lm/W	86lm/W	71lm/W
C600 L90	14.554lm	15.381lm	16.539lm	16.539lm	16.539lm	11.896lm	208W	170W	70lm/W	74lm/W	80lm/W	80lm/W	80lm/W	70lm/W
C600 T	17.077lm	18.048lm	19.406lm	19.406lm	19.406lm	13.958lm	240W	198W	71lm/W	75lm/W	81lm/W	81lm/W	81lm/W	71lm/W
C600 L135	9.659lm	10.208lm	10.976m	10.976m	10.976lm	7.895lm	134W	113W	72lm/W	77lm/W	82lm/W	82lm/W	82lm/W	70lm/W
C600 Y	14.851lm	15.695lm	16.877lm	16.877lm	16.877lm	12.139lm	217W	179W	69lm/W	72lm/W	78lm/W	78lm/W	78lm/W	68lm/W
C600 C	13.340lm	14.098lm	15.159lm	15.159lm	15.159lm	10.903lm	185W	151W	72lm/W	76lm/W	82lm/W	82lm/W	82lm/W	72lm/W
C600 CV	6.249lm	6.604lm	7.101lm	7.101lm	7.101lm	5.107lm	83W	76W	75lm/W	79lm/W	85lm/W	85lm/W	85lm/W	68lm/W

Tunable white: normalised output

Standby power: 0,5 W

LIGHTING DATA SHEET

archilum

Issue date: 01/02/2019

LED System

Correlated Colour Temperature (CCT)

Standard White - 2700K, 3000K, 4000K, 5000K, 6500K

Tunable White - 2200K to 6500K

RGB - fully dynamic

Colour Rendering Index:

Ra > 80

Ra > 90 optional for 2700K, 3000K, 4000K



Colour Tolerance:

MacAdam 3


LED Service Life:

L80 (tq 25 °C) = 50.000 h

Light Distribution

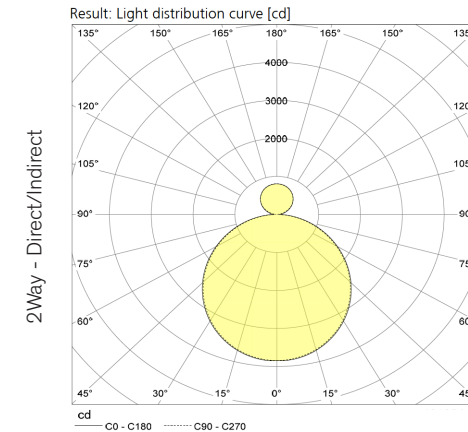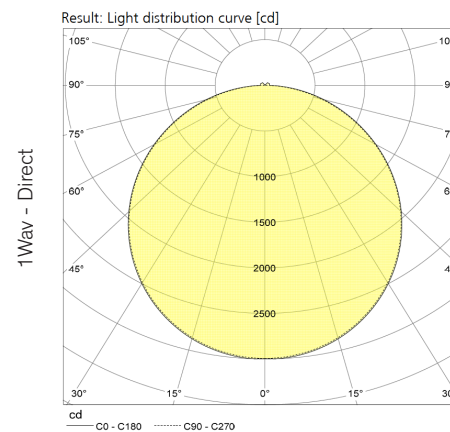

OvalXL-S

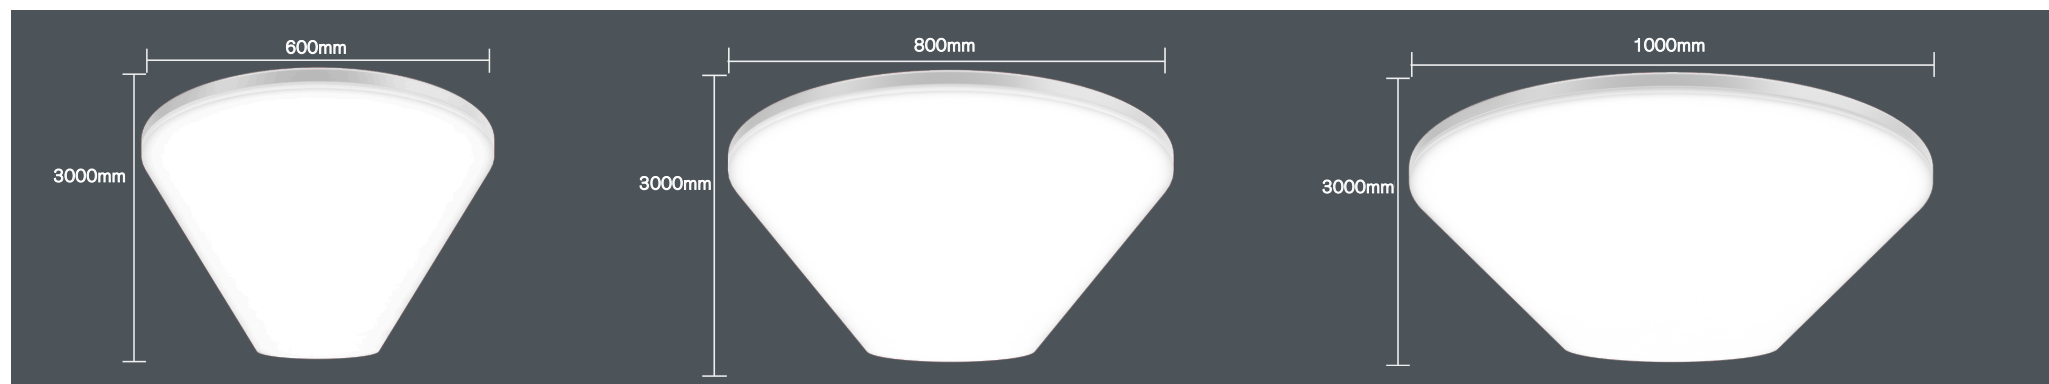

1Way (Direct)		Luminair - Luminous Flux (lm) / L=2000mm					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
OvalXL-S 600	9.814lm	10.372lm	11.153lm	11.153lm	11.153lm	8.022lm	240W	208W	41lm/W	43lm/W	47lm/W	47lm/W	47lm/W	39lm/W
OvalXL-S 800	11.435lm	12.085lm	12.995lm	12.995lm	12.995lm	9.347lm	258W	217W	44lm/W	47lm/W	50lm/W	50lm/W	50lm/W	43lm/W
OvalXL-S 1000	13.163lm	13.910lm	14.958lm	14.958lm	14.958lm	9.780lm	258W	227W	51lm/W	54lm/W	58lm/W	58lm/W	58lm/W	43lm/W

2Way (Direct/Indirect)		Luminair - Luminous Flux (lm) / L=2000mm					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
OvalXL-S 600	9.471lm	10.009lm	10.763lm	10.763lm	10.763lm	7.741lm	240W	208W	40lm/W	42lm/W	45lm/W	45lm/W	45lm/W	37lm/W
OvalXL-S 800	11.035lm	11.662lm	12.540lm	12.540lm	12.540lm	9.020lm	258W	217W	43lm/W	45lm/W	49lm/W	49lm/W	49lm/W	42lm/W
OvalXL-S 1000	12.702lm	13.424lm	14.434lm	14.434lm	14.434lm	9.438lm	258W	227W	49lm/W	52lm/W	56lm/W	56lm/W	56lm/W	42lm/W

Tunable white: normalised output

Standby power: 0,5 W

LIGHTING DATA SHEET

archilum

Issue date: 01/02/2019

LED System

Correlated Colour Temperature (CCT)

Standard White - 2700K, 3000K, 4000K, 5000K, 6500K

Tunable White - 2200K to 6500K

RGB - fully dynamic

Colour Rendering Index:

Ra > 80

Ra > 90 optional for 2700K, 3000K, 4000K



Colour Tolerance:

MacAdam 3


LED Service Life:

L80 (tq 25 °C) = 50.000 h

Light Distribution

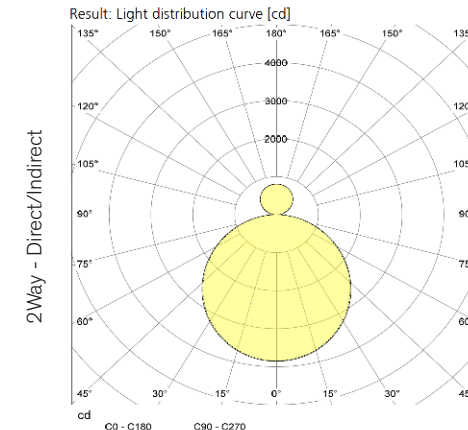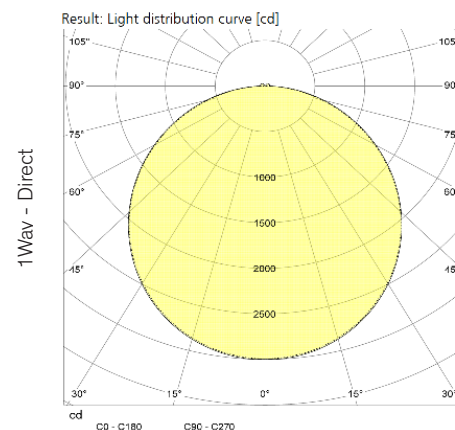

OvalXL-AS

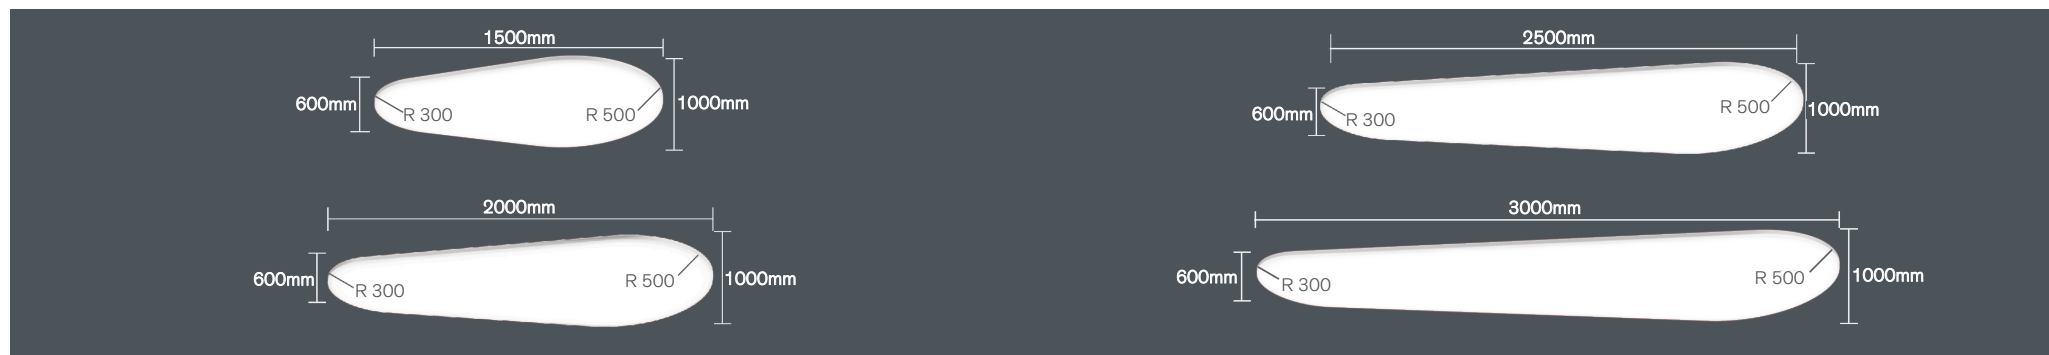

1Way (Direct)		Luminair - Luminous Flux (lm)						Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW		2700K	3000K	5000K	4000K	6500K	TW2200-6500K
OvalXL-AS 1500	9.241lm	9.766lm	10.501lm	10.501lm	10.501lm	7.553lm	203W	178W		46lm/W	48lm/W	52lm/W	52lm/W	52lm/W	42lm/W
OvalXL-AS 2000	11.515lm	12.169lm	13.085lm	13.085lm	13.085lm	9.411lm	258W	227W		45lm/W	47lm/W	51lm/W	51lm/W	51lm/W	41lm/W
OvalXL-AS 2500	13.818lm	14.604lm	15.703lm	15.703lm	15.703lm	11.294lm	304W	267W		45lm/W	48lm/W	52lm/W	52lm/W	52lm/W	42lm/W
OvalXL-AS 3000	16.132lm	17.048lm	18.331lm	18.331lm	18.331lm	13.185lm	346W	247W		47lm/W	49lm/W	53lm/W	53lm/W	53lm/W	53lm/W

2Way (Direct/Indirect)		Luminair - Luminous Flux (lm)						Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW		2700K	3000K	5000K	4000K	6500K	TW2200-6500K
OvalXL-AS 1500	8.918lm	9.424lm	10.134lm	10.134lm	10.134lm	7.289lm	203W	178W		44lm/W	46lm/W	50lm/W	50lm/W	50lm/W	41lm/W
OvalXL-AS 2000	11.112lm	11.743lm	12.627lm	12.627lm	12.627lm	9.082lm	258W	227W		43lm/W	46lm/W	49lm/W	49lm/W	49lm/W	40lm/W
OvalXL-AS 2500	13.335lm	14.093lm	15.153lm	15.153lm	15.153lm	10.899lm	304W	267W		44lm/W	46lm/W	50lm/W	50lm/W	50lm/W	41lm/W
OvalXL-AS 3000	15.567lm	16.452lm	17.690lm	17.690lm	17.690lm	12.724lm	346W	247W		45lm/W	48lm/W	51lm/W	51lm/W	51lm/W	52lm/W

Tunable white: normalised output

Standby power: 0,5 W

LIGHTING DATA SHEET

LED System

Correlated Colour Temperature (CCT)

Standard White - 2700K, 3000K, 4000K, 5000K, 6500K

Tunable White - 2200K to 6500K

RGB - fully dynamic

Colour Rendering Index:

Ra > 80

Ra > 90 optional for 2700K, 3000K, 4000K



Colour Tolerance:

MacAdam 3

LED Service Life:


L80 (tq 25 °C) = 50.000 h

Light Distribution

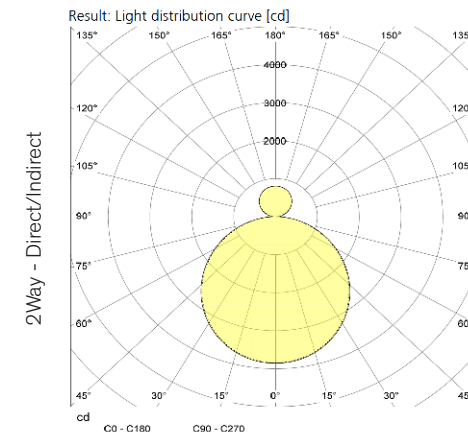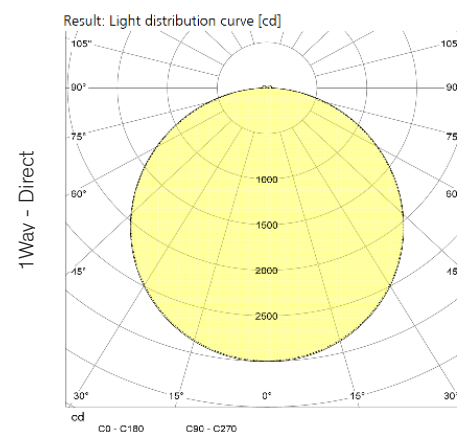


EleMents - PlaNk


Plank 300

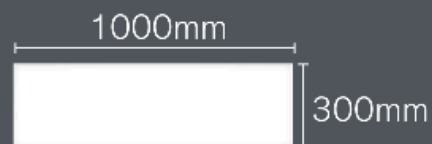

Plank 450

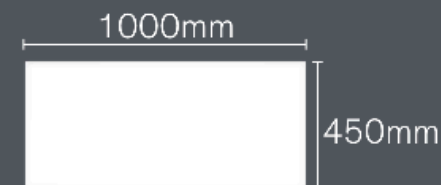

Plank 600

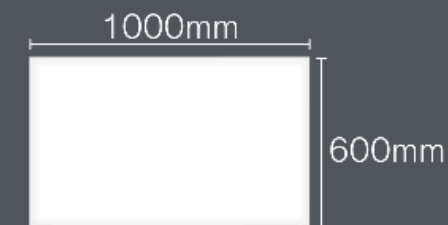

1Way (Direct)		Luminair - Luminous Flux (lm)					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
PlaNk 300	6.792lm	7.178lm	7.718lm	7.718lm	7.718lm	5.551lm	102W	89W	67lm/W	71lm/W	76lm/W	76lm/W	76lm/W	62lm/W
PlaNk 450	7.492lm	7.918lm	8.514lm	8.514lm	8.514lm	6.124lm	102W	89W	74lm/W	78lm/W	84lm/W	84lm/W	84lm/W	69lm/W
PlaNk 600	7.792lm	8.235lm	8.855lm	8.855lm	8.855lm	6.369lm	102W	89W	77lm/W	81lm/W	87lm/W	87lm/W	87lm/W	72lm/W

2Way (Direct/Indirect)		Luminair - Luminous Flux (lm)					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
PlaNk 300	6.554lm	6.926lm	7.448lm	7.448lm	7.448lm	5.357lm	102W	89W	65lm/W	68lm/W	73lm/W	73lm/W	73lm/W	60lm/W
PlaNk 450	7.230lm	7.641lm	8.216lm	8.216lm	8.216lm	5.909lm	102W	89W	71lm/W	75lm/W	81lm/W	81lm/W	81lm/W	66lm/W
PlaNk 600	7.520lm	7.947lm	8.545lm	8.545lm	8.545lm	6.146lm	102W	89W	74lm/W	78lm/W	84lm/W	84lm/W	84lm/W	69lm/W

Tunable white: normalised output

Standby power: 0,5 W

LED System

Correlated Colour Temperature (CCT)

Standard White - 2700K, 3000K, 4000K, 5000K, 6500K

Tunable White - 2200K to 6500K

RGB - fully dynamic

Colour Rendering Index:

 $Ra > 80$

Ra > 90 optional for 2700K, 3000K, 4000K




Colour Tolerance:

MacAdam 3

LED Service Life:

$$L_{80}(t_q 25\text{ °C}) = 50.000\text{ h}$$

Light Distribution

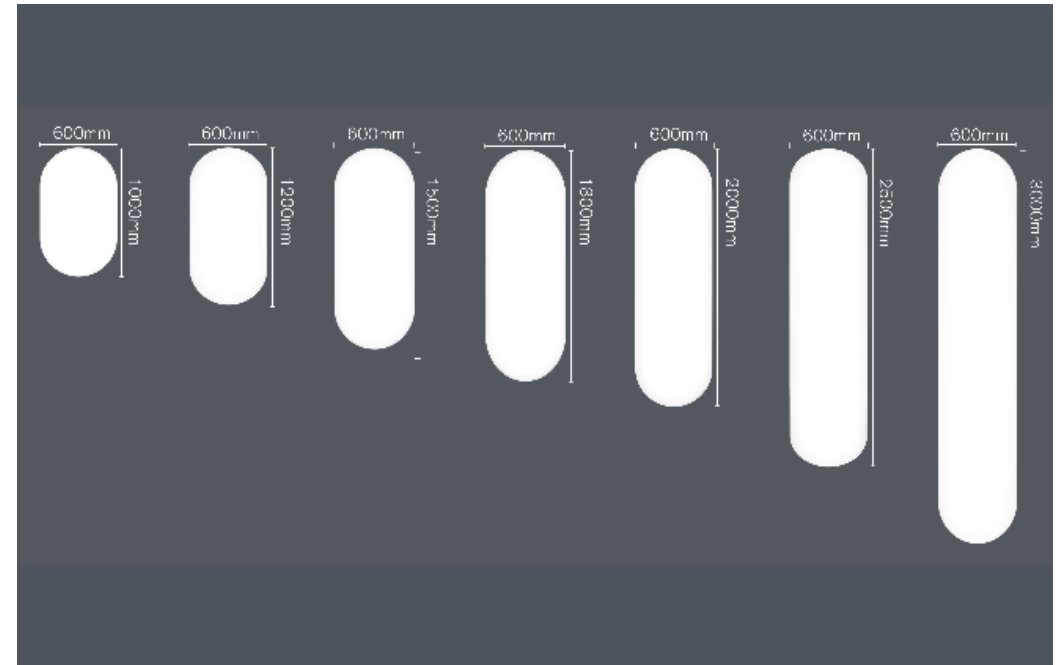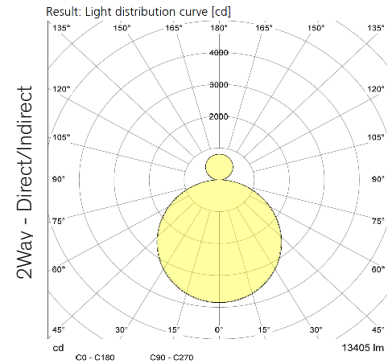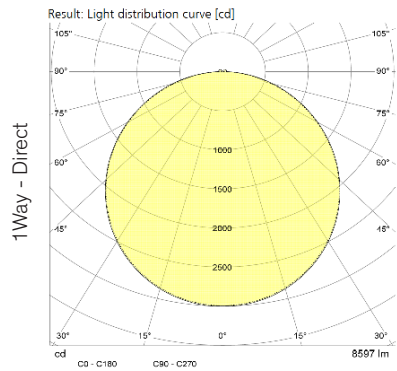

EleMents - BoaRd

1Way (Direct)		Luminair - Luminous Flux (lm)					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
BoaRd L=1000mm	5.626lm	5.945lm	6.393lm	6.393lm	6.393lm	4.598lm	134W	119W	42lm/W	44lm/W	48lm/W	48lm/W	48lm/W	39lm/W
BoaRd L=1200mm	6.463lm	6.831lm	7.345lm	7.345lm	7.345lm	5.238lm	157W	138W	41lm/W	44lm/W	47lm/W	47lm/W	47lm/W	38lm/W
BoaRd L=1500mm	8.578lm	9.065lm	9.747lm	9.747lm	9.747lm	6.310lm	185W	168W	46lm/W	49lm/W	53lm/W	53lm/W	53lm/W	38lm/W
BoaRd L=1800mm	9.974lm	10.541lm	11.334lm	11.334lm	11.334lm	7.337lm	221W	193W	45lm/W	48lm/W	51lm/W	51lm/W	51lm/W	38lm/W
BoaRd L=2000mm	10.905lm	11.542lm	12.392lm	12.392lm	12.392lm	8.022lm	239W	213W	45lm/W	48lm/W	51lm/W	51lm/W	51lm/W	38lm/W
BoaRd L=2500mm	13.232lm	13.984lm	15.036lm	15.036lm	15.036lm	9.734lm	285W	252W	46lm/W	49lm/W	53lm/W	53lm/W	53lm/W	39lm/W
BoaRd L=3000mm	15.559lm	16.443lm	17.681lm	17.681lm	17.681lm	11.445lm	332W	301W	47lm/W	50lm/W	53lm/W	53lm/W	53lm/W	38lm/W

2Way (Direct/Indirect)		Luminair - Luminous Flux (lm)					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
BoaRd L=1000mm	5.429lm	5.737lm	6.169lm	6.169lm	6.169lm	4.437lm	134W	119W	41lm/W	43lm/W	46lm/W	46lm/W	46lm/W	37lm/W
BoaRd L=1200mm	6.237lm	6.592lm	7.088lm	7.088lm	7.088lm	5.098lm	157W	138W	40lm/W	42lm/W	45lm/W	45lm/W	45lm/W	37lm/W
BoaRd L=1500mm	8.278lm	8.748lm	9.406lm	9.406lm	9.406lm	6.089lm	185W	168W	45lm/W	47lm/W	51lm/W	51lm/W	51lm/W	36lm/W
BoaRd L=1800mm	9.265lm	10.172lm	10.938lm	10.938lm	10.938lm	7.080lm	221W	193W	44lm/W	46lm/W	49lm/W	49lm/W	49lm/W	37lm/W
BoaRd L=2000mm	10.523lm	11.121lm	11.958lm	11.958lm	11.958lm	7.741lm	239W	213W	44lm/W	46lm/W	50lm/W	50lm/W	50lm/W	36lm/W
BoaRd L=2500mm	12.769lm	13.495lm	14.510lm	14.510lm	14.510lm	9.393lm	285W	252W	45lm/W	47lm/W	51lm/W	51lm/W	51lm/W	37lm/W
BoaRd L=3000mm	15.015lm	15.868lm	17.062lm	17.062lm	17.062lm	11.045lm	332W	301W	45lm/W	48lm/W	51lm/W	51lm/W	51lm/W	37lm/W

Tunable white: normalised output

Standby power: 0,5 W

LED System

Correlated Colour Temperature (CCT)

Standard White - 2700K, 3000K, 4000K, 5000K, 6500K

Tunable White - 2200K to 6500K

RGB - fully dynamic

Colour Rendering Index:

Ra > 80

Ra > 90 optional for 2700K, 3000K, 4000K




Colour Tolerance:

MacAdam 3

LED Service Life:

L80 (tq 25 °C) = 50.000 h

Light Distribution

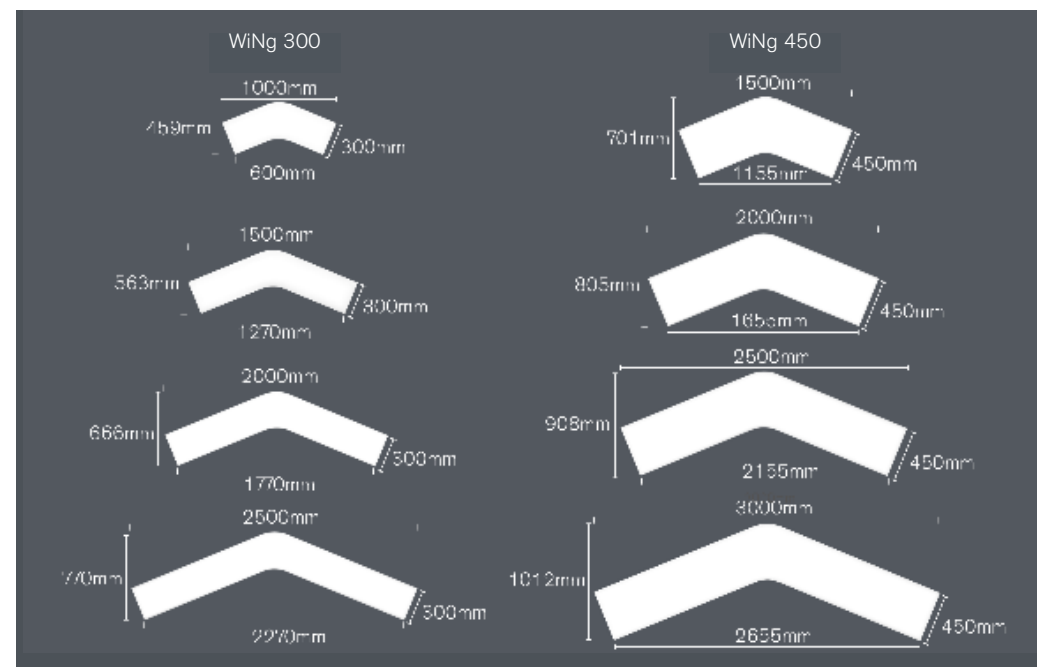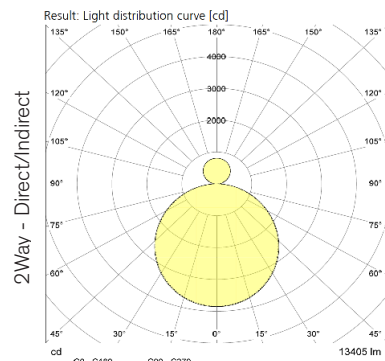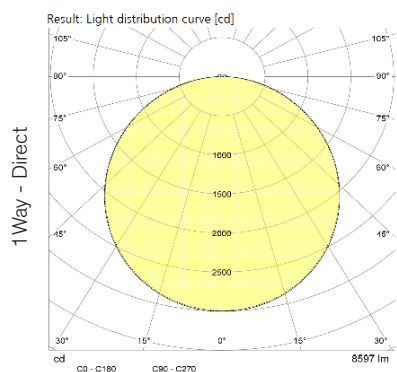

EleMents - WiNg

1Way (Direct)		Luminair - Luminous Flux (lm)						Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW		2700K	3000K	5000K	4000K	6500K	TW2200-6500K
WiNg 300 L=1000	6.479lm	6.847lm	7.363lm	7.363lm	7.363lm	5.296lm	102W	84W		64lm/W	67lm/W	73lm/W	73lm/W	73lm/W	63lm/W
WiNg 300 L=1500	10.154lm	10.730lm	11.538lm	11.538lm	11.538lm	8.299lm	152W	133W		67lm/W	71lm/W	76lm/W	76lm/W	76lm/W	62lm/W
WiNg 300 L=2000	13.753lm	14.535lm	15.629lm	15.629lm	15.629lm	11.241lm	207W	183W		66lm/W	70lm/W	75lm/W	75lm/W	75lm/W	62lm/W
WiNg 300 L=2500	17.444lm	18.435lm	19.823lm	19.823lm	19.823lm	14.258lm	267W	227W		65lm/W	69lm/W	74lm/W	74lm/W	74lm/W	63lm/W
WiNg 450 L=1500	11.201lm	11.837lm	12.728lm	12.728lm	12.728lm	9.155lm	152W	133W		74lm/W	78lm/W	84lm/W	84lm/W	84lm/W	67lm/W
WiNg 450 L=2000	15.172lm	16.034lm	17.240lm	17.240lm	17.240lm	12.400lm	207W	183W		73lm/W	77lm/W	83lm/W	83lm/W	83lm/W	68lm/W
WiNg 450 L=2500	19.243lm	20.337lm	21.868lm	21.868lm	21.868lm	15.729lm	267W	227W		72lm/W	76lm/W	82lm/W	82lm/W	82lm/W	69lm/W
WiNg 450 L=3000	22.832lm	24.130lm	25.946lm	25.946lm	25.946lm	18.662lm	318W	271W		72lm/W	76lm/W	82lm/W	82lm/W	82lm/W	69lm/W

2Way (Direct/Indirect)		Luminair - Luminous Flux (lm)						Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW		2700K	3000K	5000K	4000K	6500K	TW2200-6500K
WiNg 300 L=1000	6.253lm	6.608lm	7.105lm	7.105lm	7.105lm	5.110lm	102W	84W		62lm/W	65lm/W	70lm/W	70lm/W	70lm/W	61lm/W
WiNg 300 L=1500	9.798lm	10.355lm	11.134lm	11.134lm	11.134lm	8.009lm	152W	133W		64lm/W	68lm/W	73lm/W	73lm/W	73lm/W	60lm/W
WiNg 300 L=2000	13.272lm	14.026lm	15.082lm	15.082lm	15.082lm	10.848lm	207W	183W		64lm/W	68lm/W	73lm/W	73lm/W	73lm/W	59lm/W
WiNg 300 L=2500	16.834lm	17.791lm	19.130lm	19.130lm	19.130lm	13.759lm	267W	227W		63lm/W	67lm/W	72lm/W	72lm/W	72lm/W	61lm/W
WiNg 450 L=1500	10.809lm	11.425lm	12.283lm	12.283lm	12.283lm	8.835lm	152W	133W		71lm/W	75lm/W	81lm/W	81lm/W	81lm/W	66lm/W
WiNg 450 L=2000	14.641lm	15.743lm	16.637lm	16.637lm	16.637lm	11.967lm	207W	183W		71lm/W	75lm/W	80lm/W	80lm/W	80lm/W	65lm/W
WiNg 450 L=2500	18.570lm	19.625lm	21.103lm	21.103lm	21.103lm	15.178lm	267W	227W		69lm/W	73lm/W	79lm/W	79lm/W	79lm/W	67lm/W
WiNg 450 L=3000	22.033lm	23.285lm	25.038lm	25.038lm	25.038lm	18.009lm	318W	271W		69lm/W	73lm/W	79lm/W	79lm/W	79lm/W	66lm/W

Tunable white: normalised output

Standby power: 0,5 W

LED System

Light Distribution

Correlated Colour Temperature (CCT)

Standard White - 2700K, 3000K, 4000K, 5000K, 6500K
Tunable White - 2200K to 6500K
RGB - fully dynamic

Colour Rendering Index:


Ra > 80
Ra > 90 optional for 2700K, 3000K, 4000K

Colour Tolerance:


MacAdam 3

LED Service Life:

L80 (tq 25 °C) = 50.000 h

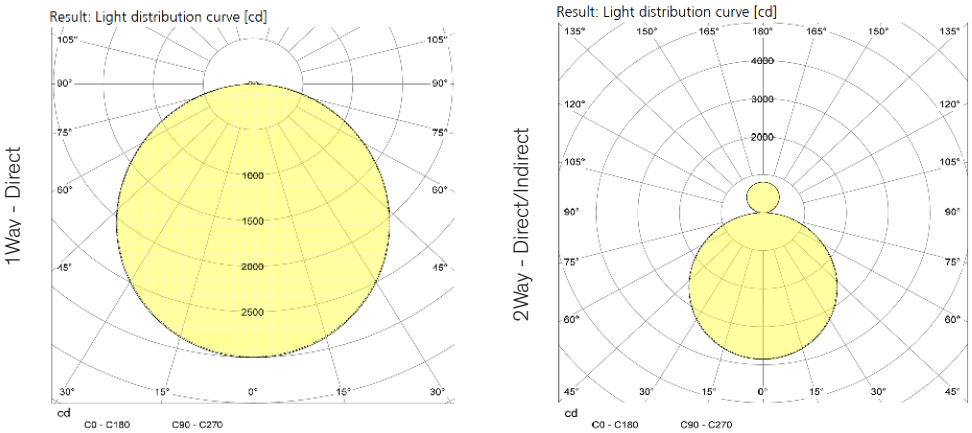

EleMents - Y(ankee)

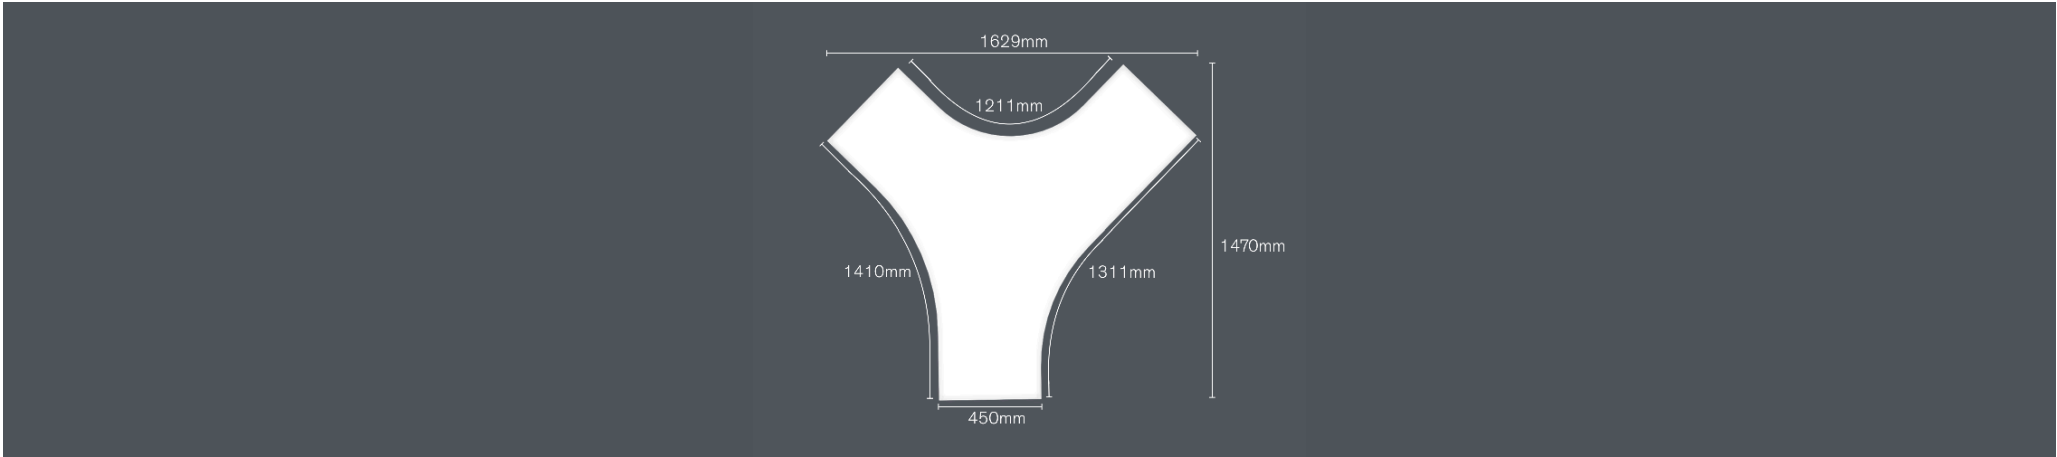

1Way (Direct)		Luminair - Luminous Flux (lm)					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
MorPh	14.729lm	15.566lm	16.738lm	16.738lm	16.738lm	12.039lm	212W	178W	69lm/W	73lm/W	79lm/W	79lm/W	79lm/W	68lm/W

2Way (Direct/Indirect)		Luminair - Luminous Flux (lm)					Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K
MorPh	14.214lm	15.022lm	16.152lm	16.152lm	16.152lm	11.618lm	212W	178W	67lm/W	71lm/W	76lm/W	76lm/W	76lm/W	65lm/W


Tunable white: normalised output
Standby power: 0,5 W

LIGHTING DATA SHEET


LED System

Correlated Colour Temperature (CCT)	Standard White - 2700K, 3000K, 4000K, 5000K, 6500K Tunable White - 2200K to 6500K RGB - fully dynamic
Colour Rendering Index:	Ra > 80 Ra > 90 optional for 2700K, 3000K, 4000K
Colour Tolerance:	MacAdam 3
LED Service Life:	L80 (tq 25 °C) = 50.000 h

Light Distribution

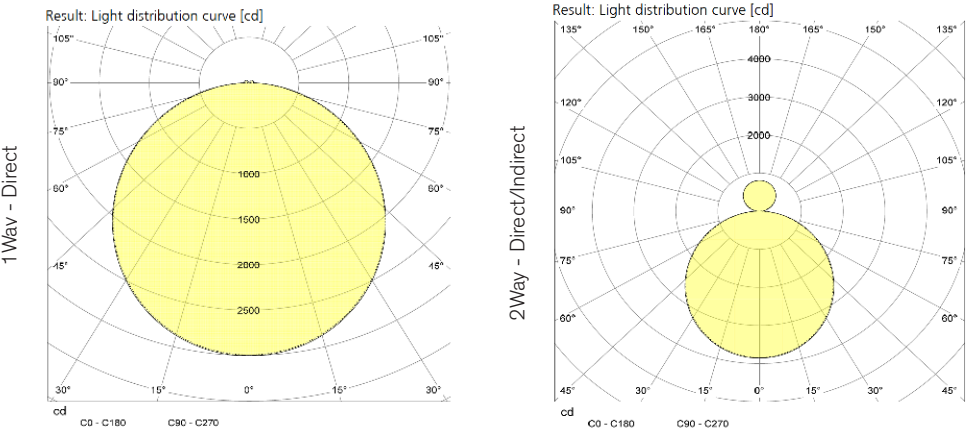

MorPh

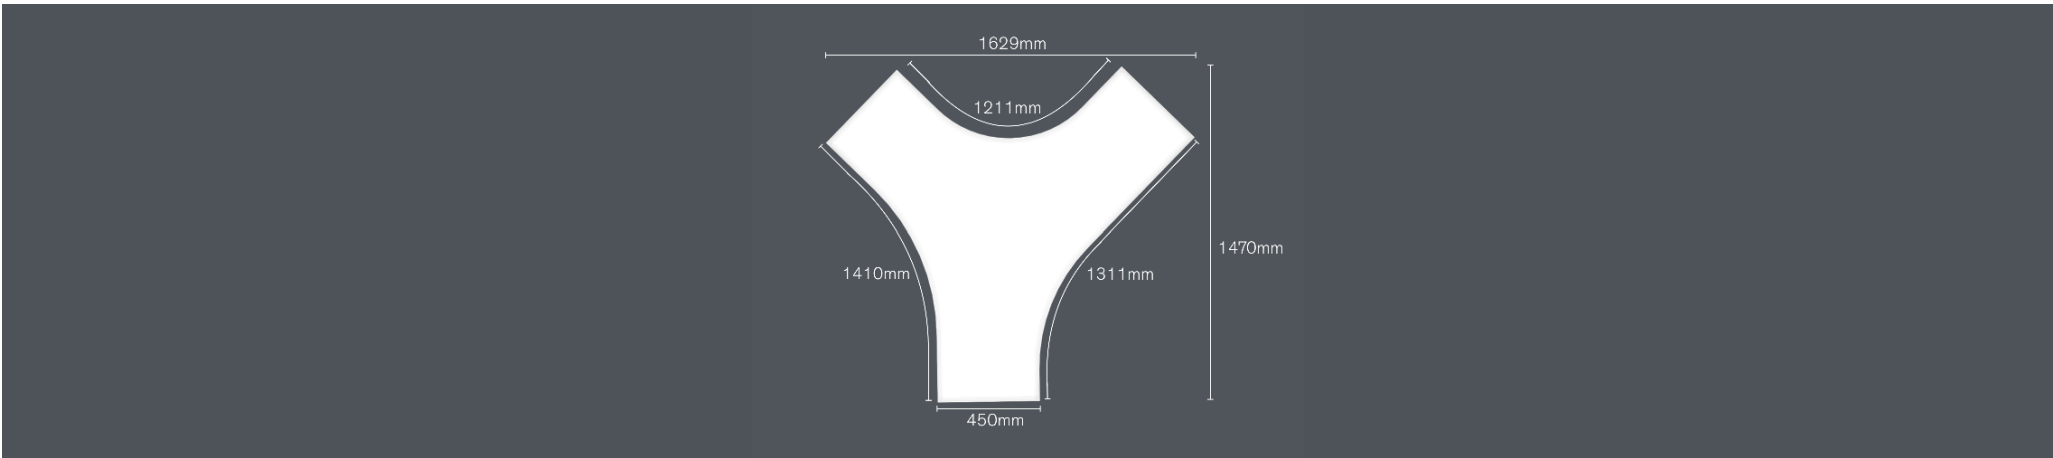

1Way (Direct)							Luminair - Luminous Flux (lm)		Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K		
MorPh	14.729lm	15.566lm	16.738lm	16.738lm	16.738lm	12.039lm	212W	178W	69lm/W	73lm/W	79lm/W	79lm/W	79lm/W	68lm/W		

2Way (Direct/Indirect)							Luminair - Luminous Flux (lm)		Input Power (W)		Luminair - Efficacy (lm/W)					
CCT	2700K	3000K	4000K	5000K	6500K	TW2200-6500K	SW	TW	2700K	3000K	5000K	4000K	6500K	TW2200-6500K		
MorPh	14.214lm	15.022lm	16.152lm	16.152lm	16.152lm	11.618lm	212W	178W	67lm/W	71lm/W	76lm/W	76lm/W	76lm/W	65lm/W		

Tunable white: normalised output
Standby power: 0,5 W