



24V LED System

Correlated Colour Temperature (CCT)	Tunable White - 2200K to 5000K
Colour Rendering Index:	Ra > 90
Colour Tolerance:	MacAdam 3
LED Service Life:	90.000h L80 at 55C

Light Distribution




AkuDisc

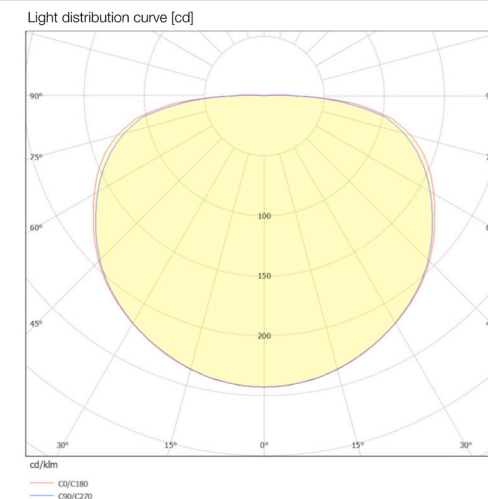

AkuDisc

Dimensions

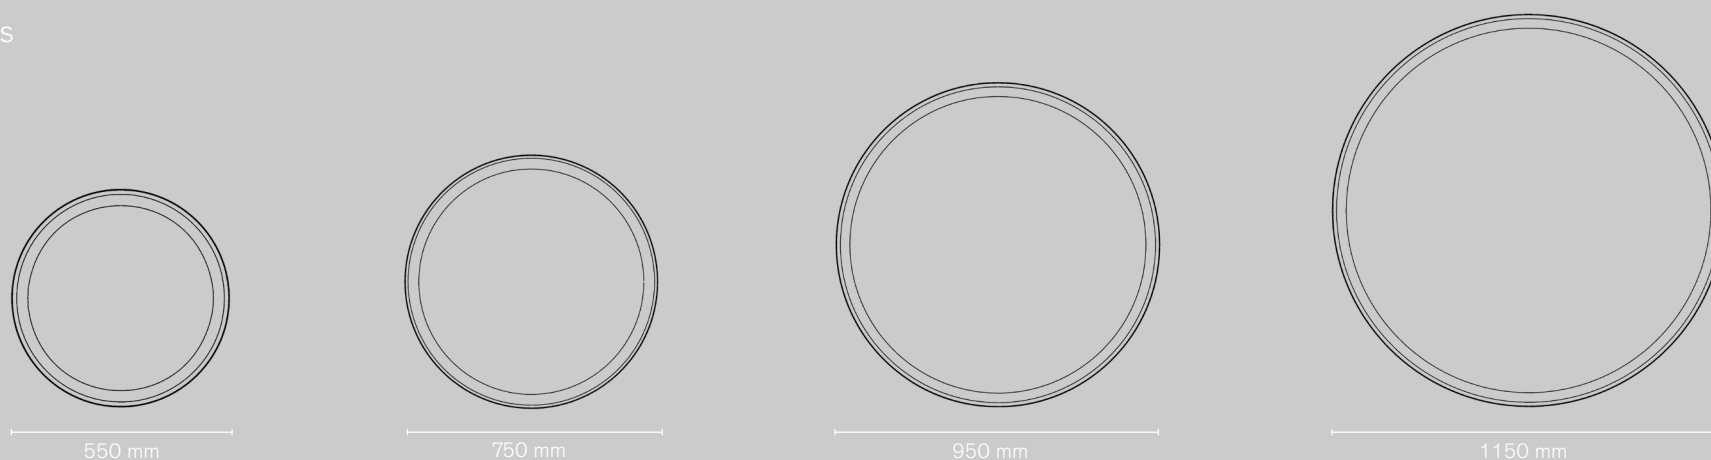

Luminaire	Luminaire - Calculated Luminous Flux (lm)		Input Power (W)	Luminaire - Efficacy (lm/W)	
	Max output (Flux) at 3600K				TW2200-5000K
550 mm	3.519lm		62W		57lm/W
750 mm	4.937lm		87W		57lm/W
950 mm	6.356lm		113W		57lm/W
1150 mm	7.777lm		138W		57lm/W

Standby power: 0,5 W

48V LED System

Correlated Colour Temperature (CCT)

Tunable White - 2200K to 6500K

Standard White - 2700K, 3000K, 4000K, 5000K, 6500K

Colour Rendering Index:

Ra > 80


Ra > 90 optional for 2700K, 3000K, 4000K

Colour Tolerance:

MacAdam 3

LED Service Life:


L80 (tq 25 °C) = 100.000 h

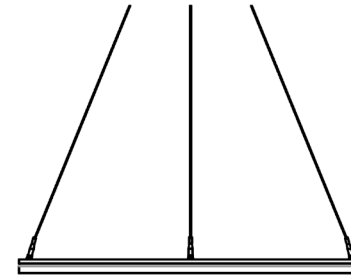

AkuDisc


Light Distribution

Light distribution curve [cd]

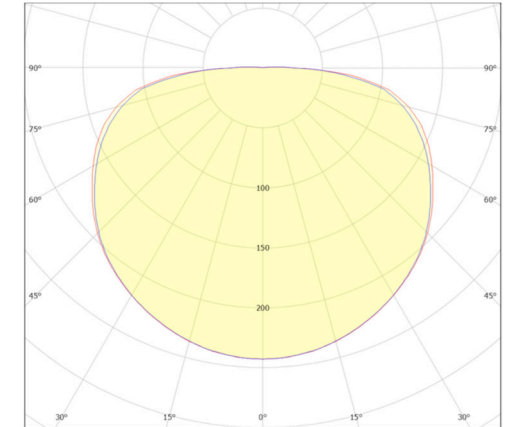


AkuDisc


Dimensions




550 mm



750 mm



950 mm

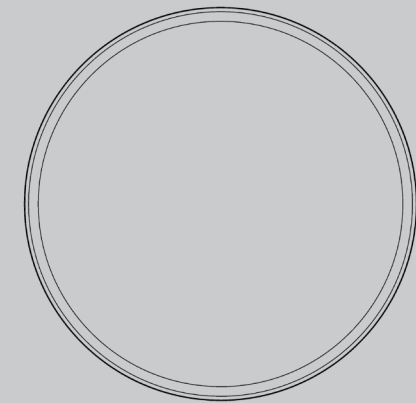

1150 mm

	Luminaire - Calculated Luminous Flux (lm)						Input Power (W)		Luminaire - Efficacy (lm/W)					
	2700K	3000K	4000K	5000K	6500K	Max output (Flux) at 3700K	SW	TW	2700K	3000K	4000K	5000K	6500K	TW2200-6500K
550 mm	3.778lm	3.993lm	4.293lm	4.293lm	4.293lm	6.302lm	88W	138W	44lm/W	46lm/W	49lm/W	49lm/W	49lm/W	46lm/W
750 mm	5.301lm	5.602lm	6.024lm	6.024lm	6.024lm	8.842lm	120W	181W	45lm/W	47lm/W	51lm/W	51lm/W	51lm/W	49lm/W
950 mm	6.824lm	7.212lm	7.754lm	7.754lm	7.754lm	11.382lm	152W	233W	45lm/W	48lm/W	51lm/W	51lm/W	51lm/W	49lm/W
1150 mm	8.349lm	8.824lm	9.488lm	9.488lm	9.488lm	13.926lm	184W	284W	46lm/W	48lm/W	52lm/W	52lm/W	52lm/W	49lm/W

Standby power: 0,5 W